


LCD Digital Clocks with Date Display

ideal for offices, conference rooms, and reception areas



Indoor
digital
single-sided

Type series
565

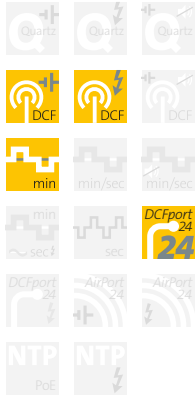

DCF77 radio controlled clocks

DCF77 radio controlled clocks will only function correctly within a radius of approx. 1,500 km around Mainflingen (50 km east of Frankfurt/M.) and under conditions of free radio propagation and may be impaired in heavily reinforced concrete structures. For this case we recommend a removable DCF77 aerial (option).

PEWETA DCFport24
PEWETA DCFport24 slave clocks require a PEWETA master clock (see from page 178 on).

LCD digital clocks with date display, 3 lines with the day-of-week spelled out. High definition, high contrast LCD display for outstanding readability even at extremely sharp angles.

Case

Extra flat AluNox® metal case with anodized surface.

LCD digital display

3-line LCD display with extra large black 9- and 42-segment ciphers respectively, top line showing hours and minutes (4 digits, cipher height 59 mm), middle line showing the day-of-week spelled out (10 digits, character height 22 mm), bottom line showing the date (6 digits, cipher height 38 mm). Optionally, room temperature may be displayed alternating with time or date.



51.565.391 shown

Technical data		
Case	material	AluNox®
	dimensions (W x H x D)	cir. 318 x 285 x 26 mm
Display	cipher height hours/minutes	59 mm
	character height date	38 mm
	character height day-of-week	22 mm
	reading distance	cir. 10 m
Weight		cir. 0.9 kg

Clock type	Item No.	€ each
DCF77 radio controlled clock, battery operated 1.5 V	51.565.391	on request
DCF77 radio controlled clock, mains operated 230 VAC	52.565.391	on request
Slave clock, minute pulse 12/24 V ¹⁾	71.565.391	on request
Telegram slave clock, DCFport24, 12/24 V ²⁾	81.565.391	on request

Accessory	Item No.	€ each
External DCF77 receiving aerial (IP 31), for radio controlled types (required only if reception quality is poor)	03.925.171	on request

Options	Suffix	Surcharge € each
Case custom enamelled	-10	on request
Integrated power supply for 230 VAC mains operation instead of battery operation (on clock type 71.xxx only)	-69	on request
Alternating room temperature display (internal temperature sensor)	-91	on request
Alternating room temperature display (external temperature sensor, IP 31)	-92	on request

AluNox®

AluNox® is an anodised aluminium. While resistant to corrosion, detergents, and disinfectants, it is also abrasion-proof. The surface of AluNox® is visually very similar to stainless steel with a matted finish, yet is noticeably lighter and impervious against fingerprints. Therefore, AluNox® is excellently suited for areas where its visual resemblance of stainless steel will mainly serve decorative purposes.

¹⁾Operation of the LCD display requires batteries (LR 6/AA type, included in delivery shipment) or an integrated power supply (optional).

²⁾Operating voltage is supplied by the master clock via DCFport24 telegram (current draw cir. 10 mA).