

LED Game Result Displays/Scoreboards, indoor “Multisport”, for most kinds of indoor sports




LED game result displays single-sided indoor

Type series
676



“resistant to thrown balls”
acc. to VDE 0710/DIN 18032

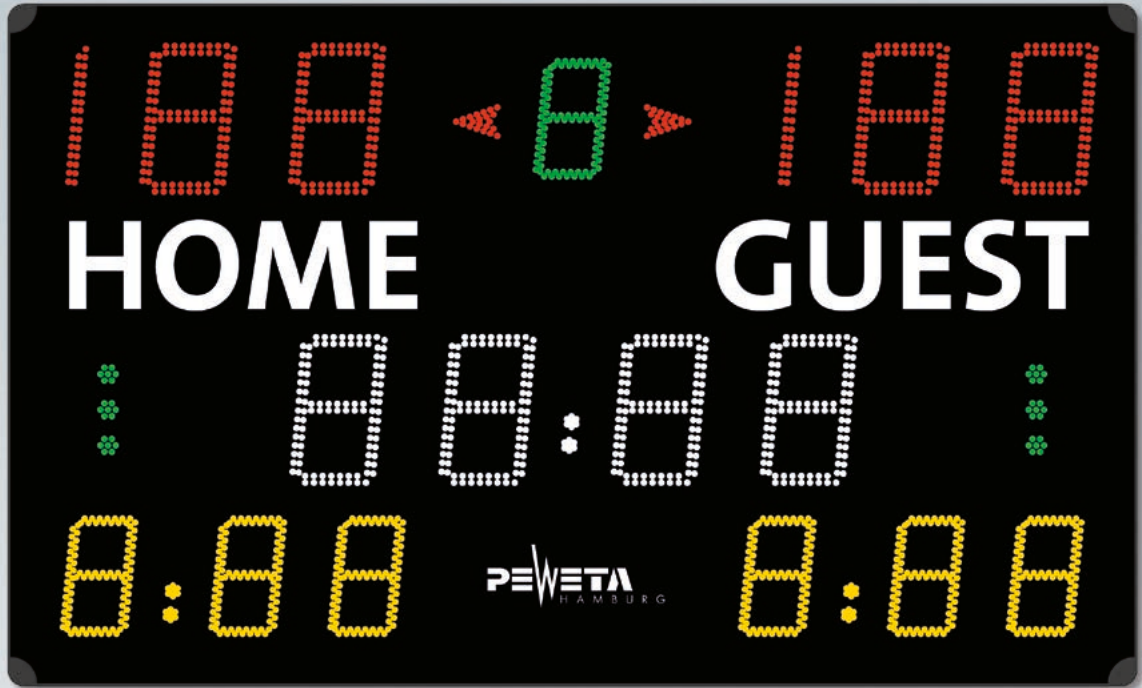

24.676.321 shown

Game result displays/scoreboards, in 7-Segment LED display technology, cipher heights 250 mm and 200 mm respectively, reading distance up to cir. 110 m. Outstandingly suited for most kinds of indoor sports, such as indoor soccer, handball, basketball, volleyball, hockey, badminton, and table tennis.

Sturdy metal case, enamelled black, for on-wall mounting, polycarbonate front glass treated for low reflectivity, resistant to thrown balls in accordance with German standards VDE 0710, part 13:1981-05 and DIN 18032, part 3.



24.676.322 shown

Game result display board with LED text display for team names

Soccer scoreboards for outdoors

see pages 180 and 181.

■ Scoreboard 24.676.321:

- **Time display** (250 mm), 4-digit, white, showing minutes and seconds of game time, time elapsed or time-to-go
- **Real time clock** (250 mm), showing current time in hours and minutes when no game is going on (instead of game time), quartz-based, optionally DCF77 radio controlled (including receiving aerial) or connected to a PEWETA Master Clock by means of a *DCFport24* interface (accessories)
- **Score** (250 mm), 3 digits (0..199) per team, red, showing score/final result
- **Period** (200 mm), 1 digit, green, showing current period of game
- **Penalty time** (200 mm), 3 digits per team, amber, showing penalty time remaining
- **Team fouls** (200 mm), 1 digit per team, amber, showing total fouls per team during basketball games (instead of penalty time)
- **Time-out**, 3 symbols per team (green dots), showing time-out periods taken
- **Service**, 1 symbol per team (red arrow), showing service or ball possession
- **Acoustic signal** (horn), built-in, indicates time-out, end of period or game over, may be triggered either automatically or manually (116 dB at 1 m)
- Permanent **HOME/GUEST** marking by self-adhesive film, available in various languages.

Scope of delivery

- **1 control panel**, multi-lingual, data transfer by radio, frequency 868..869 MHz (standard), or wire-based (option or accessory), with LCD display and keyboard. 13 kinds of sports stored. Additional, freely programmable mode or training mode
- **1 wall plug adapter** for charging the rechargeable batteries of the control panel
- **1 hand-held control unit** to send start, stop, and time-out commands and to trigger the horn, incl. 2 m wire for hook-up with the control panel (if required)
- **1 transport case** (cir. 355x255x86 mm) to safely store control panel, control unit, and plug adapter.

■ Scoreboard 24.676.322:

- exactly as Scoreboard 24.676.321, however, additionally with
- **LED text display** (120 mm), amber, alphanumeric, to indicate the teams' names (instead of "HOME", "GUEST"), up to 9 characters per team, or to display information/advertisements with up to 20 characters in moving-script-method (up to 1,000 characters programmable). PC keyboard with connection wire to the control panel is included.

Further models

of this type series with 150 mm LED cipher height for small (single field) sports halls are available on request.

Technical data	
Data transmission	wireless 868..869 MHz (standard) or wire-based (as an option or as an accessory)
Case dimensions (WHD)	cir. 1900x1150x90 mm
Front cover	polycarbonate treated for low reflectivity
Character heights	250 mm and 200 mm, respectively
Reading distance	cir. 110 m, view angle cir. 160°
Weight	cir. 35 kg
Operating voltage	mains 220..230 V AC/50..60 Hz

Type	Item No.	€ each
Scoreboard with HOME/GUEST marking by self-adhesive film	24.676.321	4,490.–
Scoreboard with LED text display	24.676.322	5,990.–

Option	Suffix	Surcharge € each
Wire-based data transfer (instead of wireless data transfer), 1 plug, 1 socket A4, and 10 m of wire included	-64	none

Accessories	Item No.	€ each
DCF77 receiving aerial (IP65) for precise local time and fully automatic change-over of summer/winter time	03.925.185	290.–
Time display interface to import the <i>DCFport24</i> pulse telegram from a PEWETA type series 920 master clock	04.676.000	95.–
Set of wires for wire-based or wireless data transfer from control panel to scoreboard, 10 m of wire, plug, and socket included	04.676.001	120.–
Additional plug and socket A3 to control the panel from a further location (for wireless operation using set of wires 04.676.001)	04.676.101	90.–
Additional plug and socket A4 to control the panel from a further location (for wire-based data transfer using option -64)	04.676.102	90.–

Control panel and software

Modes for 13 different kinds of sports plus an additional, freely programmable mode and a training mode (cycles and breaks adjustable) are stored in the control panel. Various parameters, like the duration of a game, extra time, time out, etc., can be adjusted as required, e.g. for youth teams. Up to 10 individual configurations with individual names such as "handball juniors" can be saved. Software updates can be loaded by flash drive using the built-in USB interface, e.g. in case of rule changes.

Data transfer

There are 3 possible methods to transfer data from the control unit to the scoreboard:

1 Wireless data transfer 868..869 MHz (standard)

Data transfer by radio transmission only.

A built-in rechargeable battery provides for operating power of the control unit (periodic charging required).

2 Wireless data transfer and set of wires Item. No. 04.676.001

Choice of wireless or wire-based data transfer (wire type J-Y(ST)Y 4x2x0,8 mm²).

A built-in rechargeable battery provides for operating power of the control unit (periodic charging required).

3 Wire-based data transfer, suffix -64

Wire-based data transfer only

(wire type J-Y(ST)Y 4x2x0,8 mm²).

The control unit receives its operating voltage from the scoreboard by wire (no battery charging required).



LED game result displays
single-sided indoor

Type series

676



Soccer scoreboards for outdoors

see pages 180 and 181.